



## OUTDOOR



**Weather-resistant  
and non-slip**



Granuflex's circular rubber tiles and drainage solutions are virtually impervious to the weather, making them ideally suited for outdoor use. Rubber has an excellent and natural damping effect, so people will be less likely to injure themselves in the event of a fall. Moreover, its non-slip properties are an obvious boost to safety.


And the maintenance of all circular tiles for outdoor use couldn't be easier. A brush, water and some non-aggressive soap and, in no time at all, they'll be as good as new.



## HOBBY TILE 25MM

Rubber tile suitable for many applications. A terrace can be laid on a balcony, roof, patio and/or garden in no time at all. And the installation of a walkway or damping surface is both quick and easy.


400x400MM  
221ZWA025BL040XX

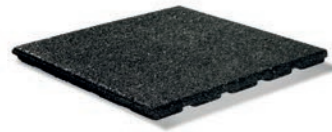

## HOBBY TILE 25MM

Rubber tile suitable for many applications. A terrace can be laid on a balcony, roof, patio and/or garden in no time at all. And the installation of a walkway or damping surface is both quick and easy.


500x500MM  
221ZWA025BL050XX

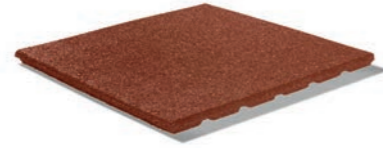

## HOBBY TILE 25MM

Rubber tile suitable for many applications. A terrace can be laid on a balcony, roof, patio and/or garden in no time at all. And the installation of a walkway or damping surface is both quick and easy.

1,000x1,000MM  
221ZWA025BL100XX

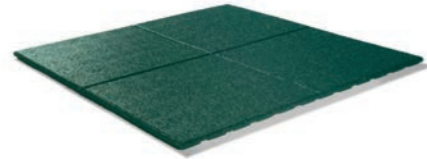

## ARTIFICIAL GRASS GALLERY TILE NATURAL LOOK 50MM

Tile with a long-fibred artificial grass top layer. Without pin/hole connection. Its high quality artificial grass lends it a very natural appearance.

500x500MM  
230KGR030B4050ET



## TILE SUPPORT 10MM

Tile supports are typically used to protect the bituminous layer on roof terraces/gardens and flat roofs. They are the perfect solution for supporting stone or concrete tiles. Packaged per 144 pieces.


100x100MM  
(Other sizes are available on request)  
228ZWA010AA100GR




## OPTI-DRAIN DRAINAGE MAT

A mat that is used to control drainage and is available in both horizontal and vertical configurations. Equipped with a handy interlocking system and geo-textile layer.

20,000x1,200MM  
230ZWA009HD120XX

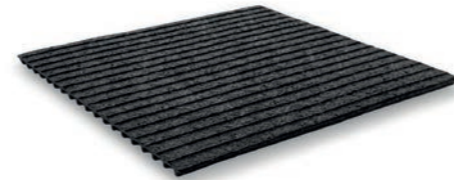

### CHARACTERISTICS



### COLOURS



### GUARANTEE


3 YEARS

GRANUFLEX® RUBBER TILES COMPLY WITH THE REQUIREMENTS OF REACH REGULATION EU 1907/2006. IN ACCORDANCE WITH ENTRY 50 ANNEX XVII OF THIS REACH REGULATION, THIS PRODUCT SHOULD NOT BE USED IN SITUATIONS IN WHICH FREQUENT SKIN CONTACT IS POSSIBLE OR AS A SURFACE ON WHICH CHILDREN REGULARLY PLAY.

## OUTDOOR STANDARD 30MM

For outdoor fitness areas, basic duty. Coarse granulate structure. Top side flat and profiled base.

1,000x1,000MM  
226ZWA030M4100FI

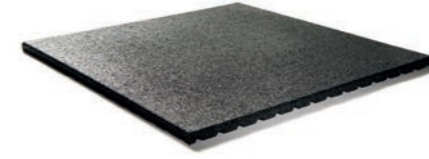

## OUTDOOR XTREME 43MM

For outdoor fitness areas, basic duty. Coarse granulate structure. Top side flat and profiled base.

1,000x1,000MM  
226ZWA043M4100FI



## RUBBER ADHESIVE IN A CARTRIDGE

Perfect for gluing, mounting and sealing. Remains elastic, tensile strength (DIN 53404) 27kg/cm<sup>2</sup>.

230XXX010F1XXXGJ



### CHARACTERISTICS



### COLOURS



### GUARANTEE



2 YEARS



# PLAYGROUNDS

## TSP70 PLAYGROUND TILE 40 | 45 | 55 | 65MM

The rubber Granuflex® TSP70 playground tiles are wear-resistant and easy to maintain. With certified fall heights according to EN-1177:2018, they provide a safe surface for playgrounds and recreational areas. For the most sustainable and colourful result, the tile consists of at least 96% recycled car tires with an EPDM top layer. Available in five natural colours, size 500x500mm.

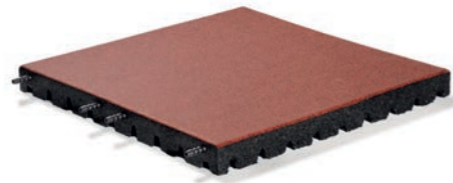

The overview below shows the HIC rating (maximum free-fall height) for each available tile thickness. When even higher demands are to be placed on the damping effect, you can complement the TSP70 tiles with our High Impact Underlay.

### HIC-RATING OVERVIEW TSP70



TILE THICKNESS	FREE-FALL HEIGHT	COMBINED WITH UNDERLAY
TSP70 40mm	1.23m	2.39m
TSP70 45mm	1.30m	2.61m
TSP70 55mm	1.43m	2.93m
TSP70 65mm	1.95m	3.00m

## RUBBER GRANULATE 2.0-3.5MM

Rubber granulate of this grade is optimally suited for the creation of a durable damping foundation beneath seamless (rubber) playground floors.

333ZWA020035B1000N



## HIGH IMPACT UNDERLAY 30MM


Underlay with excellent damping properties to be used in combination with TSP70 tiles. The underlay is permeable to water, has a very long lifespan and is 100% recyclable.

1.500x2.000MM  
230WIT030B4200FS



## ECO SAFE PLAY TILES 40 | 45 | 55 | 65MM

Granuflex® Eco Safe Play playground tiles are fully recyclable and available in black, grey, green and red. They are HIC certified according to EN-1177:2018, sustainable and easy to maintain. For those looking for a safe and circular surface, the ESP playground tile is the right solution.



The overview below shows the HIC rating (maximum free-fall height) for each available tile thickness. When even higher demands are to be placed on the damping effect, you can complement the Eco Safe Play tiles with our High Impact Underlay.

### HIC-RATING OVERVIEW ESP



TILE THICKNESS	FREE-FALL HEIGHT	COMBINED WITH UNDERLAY
ESP 40mm	1.27m	2.32m
ESP 45mm	1.29m	2.52m
ESP 55mm	1.52m	2.93m
ESP 65mm	2.01m	3.00m

## ARTIFICIAL GRASS TILE 50MM

Our artificial grass tiles have a natural appearance, remain beautiful 365 days a year. With certified fall heights in accordance with EN-177, they offer a safe surface for playgrounds up to a fall height (HIC) 1.08 m. HIC value in combination with a High Impact Underlay 30 mm: 2.30 m. The tile consists of at least 94% recycled vehicle tires.

500x500MM  
230KGR030B4050ET



## RUBBER ADHESIVE IN A CARTRIDGE

Granuflex® rubber adhesive is ideal for bonding and assembling rubber playground tiles. Remains elastic, tensile strength (DIN 53404) 27kg/cm². Packed in a box of 12 pieces.

230XXX010FIXXXGJ



### CHARACTERISTICS



### COLOURS



### GUARANTEE



### CERTIFICATION



GRANUFLEX® TSP70 TILES COMPLY WITH THE REQUIREMENTS OF REACH REGULATION EU 1907/2006. IN ACCORDANCE WITH ENTRY 50 ANNEX XVII OF THIS REACH REGULATION, THIS PRODUCT CAN BE USED IN SITUATIONS IN WHICH FREQUENT SKIN CONTACT IS POSSIBLE OR AS A SURFACE ON WHICH CHILDREN REGULARLY PLAY.

### CHARACTERISTICS



### COLOURS



### GUARANTEE



### CERTIFICATION




GRANUFLEX® ECO SAFE PLAY TILES COMPLY WITH THE REQUIREMENTS OF REACH REGULATION EU 1907/2006. IN ACCORDANCE WITH ENTRY 50 ANNEX XVII OF THIS REACH REGULATION, THIS PRODUCT CAN BE USED IN SITUATIONS IN WHICH FREQUENT SKIN CONTACT IS POSSIBLE OR AS A SURFACE ON WHICH CHILDREN REGULARLY PLAY.



## FALL PROTECTION TILE 20 | 30 | 43 | 55MM

Rubber tile for free-fall heights of 0.7 to 1.6m.


500x500MM  
223ZWA020AA050XX

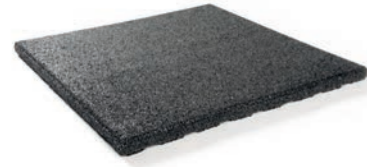

## FALL PROTECTION TILE 30 | 40 | 45 | 55 | 65 | 75 | 85 | 100MM

Rubber tile for free-fall heights of 0.7 to 3.0m.


1,000x1,000MM  
223ZWA085AA100XX

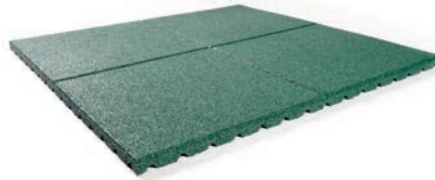

## FALL PROTECTION TILE WITH PIN/HOLE 30 | 40 | 45 | 55 | 65 | 75 | 85 | 100MM

Rubber tile for free-fall heights of 0.9 to 2.6m.

500x500MM  
223ZWA030M3050XX

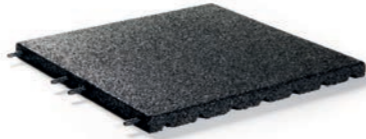

## HALF FALL PROTECTION TILE WITH PIN/HOLE

To be combined with Granuflex pin/hole tiles.


500x250MM  
223ZWA100M3S25XX



## BEVELLED PIN/HOLE TILE

To be combined with Granuflex pin/hole tiles.


500x500MM  
223ZWA030V6050XX

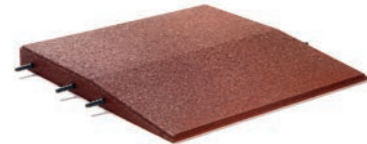

## CORNER PIN/HOLE TILE

To be combined with Granuflex pin/hole tiles.

500x500MM  
223ZWA030V7050XX

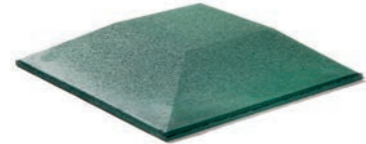


## HIGH IMPACT UNDERLAY 30MM

Underlay with excellent damping properties. Use in combination with Granuflex rubber tiles.

1,500x2,000MM  
230WIT030B4200FS



### CHARACTERISTICS

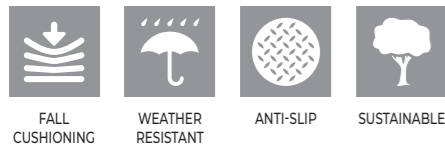

### COLOURS



### GUARANTEE



### CERTIFICATION




GRANUFLEX® SAFETY TILES COMPLY WITH THE REQUIREMENTS OF REACH REGULATION EU 1907/2006. IN ACCORDANCE WITH ENTRY 50 ANNEX XVII OF THIS REACH REGULATION, THIS PRODUCT SHOULD NOT BE USED IN SITUATIONS IN WHICH FREQUENT SKIN CONTACT IS POSSIBLE OR AS A SURFACE ON WHICH CHILDREN REGULARLY PLAY. SHOULD THIS BE NECESSARY, GRANUFLEX ECOSAFEPLAY PLAYGROUND TILES ARE A SUITABLE SOLUTION.

## HOBBY TILE 25MM

Rubber tile suitable for many applications. A terrace can be laid on a balcony, roof, patio and/or garden in no time at all. And the installation of a walkway or damping surface is both quick and easy.


400x400MM  
221ZWA025BL040XX



## HOBBY TILE 25MM

Rubber tile suitable for many applications. A terrace can be laid on a balcony, roof, patio and/or garden in no time at all. And the installation of a walkway or damping surface is both quick and easy.


500x500MM  
221ZWA025BL050XX

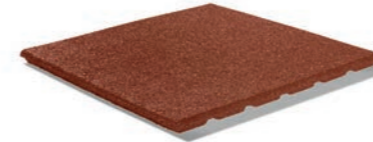

## HOBBY TILE 25MM

Rubber tile suitable for many applications. A terrace can be laid on a balcony, roof, patio and/or garden in no time at all. And the installation of a walkway or damping surface is both quick and easy.

1,000x1,000MM  
221ZWA025BL100XX

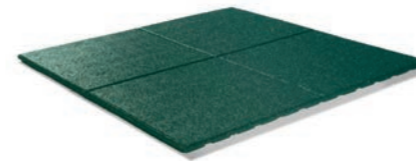

## ARTIFICIAL GRASS TILE NATURAL LOOK 50MM

Tile with a long-fibred artificial grass top layer. Without pin/hole connection. Its high quality artificial grass lends it a very natural appearance.

500x500MM  
230KGR030B4050ET



### CHARACTERISTICS



### COLOURS



### GUARANTEE



GRANUFLEX® RUBBER TILES COMPLY WITH THE REQUIREMENTS OF REACH REGULATION EU 1907/2006. IN ACCORDANCE WITH ENTRY 50 ANNEX XVII OF THIS REACH REGULATION, THIS PRODUCT SHOULD NOT BE USED IN SITUATIONS IN WHICH FREQUENT SKIN CONTACT IS POSSIBLE OR AS A SURFACE ON WHICH CHILDREN REGULARLY PLAY.



# LADDER MATS

## LADDER MAT BASIC 56MM

Ladder mat suitable for ladders up to 95cm wide and developed in such a way that the risk of a ladder slipping is reduced to a minimum. They are made from a mix of circular rubber and polymers and are TÜV certified.

1,000x250MM  
229ZWAXXB1L25XX



## LADDER MAT PRO 56MM

Ladder mat suitable for ladders up to 125cm wide with handle and developed in such a way that the risk of a ladder slipping is reduced to a minimum. They are made from a mix of circular rubber and polymers and are TÜV certified.

1,300x300MM  
229ZWAXXB1L30XX



### CHARACTERISTICS



SAFE



ANTI-SLIP



WEAR  
RESISTANT



SUSTAINABLE

### COLOURS



### GUARANTEE

3 YEARS

### CERTIFICATION

SLIP RESISTANCE NEN 2484

